



Type:   
 Project:

## MOTUS – Dual Sensor Linear LED Strip



IR Remote Shown

### Specification:

- Length: 2ft / 4ft
- Input Voltage: 120 ~ 277V
- PF: ≥ 0.9
- THD: < 20%
- CCT: 4000K & 5000K
- Operating Temp: -20 ~ 40°C
- Time delay is default at 5 minutes and is adjustable using optional remote
- Sensor range may field adjustable to 20ft, 30ft or 40ft via IR remote


### Applications:

- Corridor
- Stairwell
- Hallway
- Storage Room

### Features:

- Anti-Rust Coating
- Bi-Level Dimming  
Full-On/Standby: 100%/30%
- Adjustable Time Delay and Range Sensitivity via IR Remote
- Dual 360°/26ft Detection Zone Passive Infrared Sensor
- Suitable for Damp Locations
- 5 Year Warranty
- Optional Emergency Battery Backup 450 lm for 90+ mins

Ra83

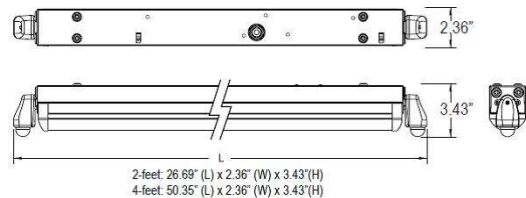

### Lumen Package:

Form Factor	Lumen	Watts	LPW
2ft	1597	13	122
4ft	3255	27.5	118

Series	Length- Watts	CRI- CCT	Dual-OS	EMR	Accessories
MOTUS	-	-	-	-	-
	2-13WT	8-40K	D-OS	EMR	Cord & Plug
	4-26WT	8-50K			IR-Remote

## Mirus Lighting, Inc.

9120 Center Ave, Rancho Cucamonga, CA 91730  
Tel: 1-800-255-8990 E-mail: [sales@miruslighting.com](mailto:sales@miruslighting.com)



An Affiliate Company